


Cat 3 Riser 24 AWG 4 Pair Communications Cable

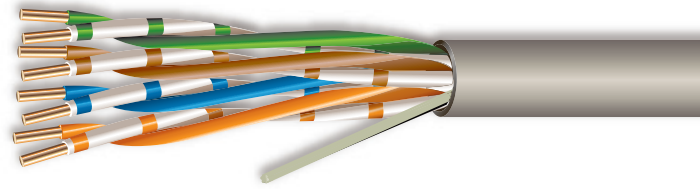

**24 AWG Solid
Bare Copper**

300 Volts

**SR-PVC
Insulated**

-10 °C to +75 °C

**2' Sequential
Footage Markers**

APPLICATIONS

Voice, 10BaseT, 100Base VG AnyLAN, 4 Mbps Token Ring, 10 Mbps Ethernet, 5/155 Mbps ATM, ISDN.

CONDUCTORS

24 AWG Solid bare copper.

ASSEMBLY

4 twisted pairs cable to a left-hand lay. Nylon ripcord for ease of jacket stripping.

INSULATION

SR-PVC .039 in O.D.

JACKET

0.014" nominal wall gray flame-retardant polyvinyl chloride (PVC)

INDUSTRY STANDARDS / CERTIFICATIONS

UL® Listed Type CMR
ETL Verified to TIA-568-B.2 Category 3
C (UL) CMR
NEC Article 800
UL 1666 Riser Flame Test
RoHS Compliant

SURFACE PRINT

Sample: COMTRAN CORP. (01-12345) 24 AWG CMR C(UL)US - IEEE 802.3 10 BASE T - ETL VERIFIED TO TIA 568-B.2-1 CATEGORY 3 (MM/YY) RoHS 000002 FT

©2010, Cerrowire LLC
All Rights Reserved



MADE IN USA

cerrowire

Electrical Division 800.523.3869 | FAX 877.877.9563
Consumer Markets Division 866.572.3776 | FAX 812.793.2626
www.cerrowire.com

Cat 3 Riser

24 AWG 4 Pair Communications Cable

CERRO FINISHED GOODS PART #	DESCRIPTION	PUT-UP	PACKAGE TYPE	SPOOLS/COILS PER MASTER CARTON	SHIPPING WEIGHT PER MASTER CARTON	UPC CODE
267-0124C	24G 4P Cat 3 Riser 100' Pre-Cut	100	Header Card	8	12.6400	048243377404
267-0124K5	24F 4P Cat 3 Riser 1000'	1000	Box	1	15.8000	048243374762