


In-Wall Speaker Wire

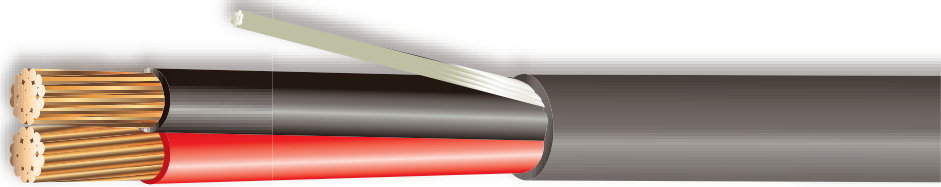

**Bare and Tinned
Stranded Copper**

**PVC Insulation/
Jacket**

**2' Sequential
Footage Markers**

APPLICATIONS

Suitable for use as data communications and/or security applications

CONDUCTORS

Bare copper conductors.

ASSEMBLY

Stranded bare and tinned copper conductors laid parallel or round and bonded together with an extruded polyvinyl chloride (PVC) jacket.

JACKET

Polyvinyl chloride (PVC) jacket.

INDUSTRY STANDARDS / CERTIFICATIONS

Meets FT-4

UL Listed as Type CL3R/FPLR C(UL) US CMR

RoHS Compliant

©2010, Cerrowire LLC
All Rights Reserved



MADE IN USA

cerrowire

Electrical Division 800.523.3869 | FAX 877.877.9563
Consumer Markets Division 866.572.3776 | FAX 812.793.2626
www.cerrowire.com

In-Wall Speaker Wire

PRODUCT CODE NUMBER	NUMBER OF COND.	AWG SIZE	COND STRAND	NOMINAL INSULATION WALL		NOMINAL JACKET THICKNES		NOMINAL OVERALL DIAMETER		UPC CODE
				MM	INCHES	MM	INCHES	MM	INCHES	
2602-12102C	2	16	19/0.0117	0.229	0.009	0.356	0.014	4.47	0.176	048243994861
2602-12102J	2	16	19/0.0117	0.229	0.009	0.356	0.014	4.47	0.176	048243318216
2602-12104J	4	16	19/0.0117	0.229	0.009	0.356	0.014	5.26	0.207	048243318247
2602-12104C	4	16	19/0.0117	0.229	0.009	0.356	0.014	5.26	0.207	048243994854
2602-1402C	2	14	19/0.0117	0.229	0.009	0.356	0.014	5.26	0.207	048243994878
2602-1402J	2	14	19/0.0117	0.229	0.009	0.356	0.014	5.26	0.207	048243318308

In-Wall Speaker Wire Color Code Chart

NUMBER OF CONDUCTORS	BLACK	RED	WHITE	GREEN
2	X	X		
4	X	X	X	X