


Copper SEU

Type SE, Style U
Service Entrance

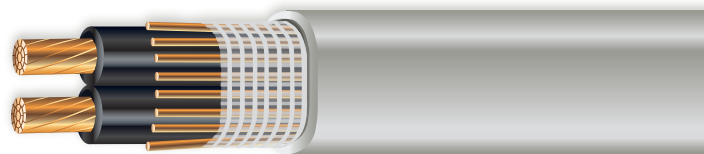

90°C Dry or Wet

600 Volts

**THHN Copper
Conductors**

APPLICATIONS

May be used as service-entrance conductors when installed as required by NEC* Article 230. May be used for branch circuits or feeders within a building as specified by the NEC Section 338-10.

CONDUCTORS

Stranded conductors: uncoated copper per ASTM-B3, ASTM-B8, and ASTM-B787

INSULATED CONDUCTORS

Type THHN conductors
Black PVC (polyvinyl chloride), rated 90°C in wet or dry locations
Jacketed with black nylon (polyamide)
Polarity ID: A red stripe on one conductor's insulation surface

NEUTRAL CONDUCTOR

Stranded, uncoated copper per ASTM-B3, ASTM-B8, and ASTM-B787

ASSEMBLY

Parallel-laid conductors with the neutral conductor between the two insulated conductors. Conductors are wrapped with a fiberglass-reinforced polyester tape.

JACKET

Gray, sunlight-resistant PVC (polyvinyl chloride) over entire assembly

INDUSTRY STANDARDS

UL 83 (Insulated Conductors)
UL 854 Service Entrance Cables, FILE NO. 11098
ASTM-B3
ASTM-B8
ASTM-B787
Federal Specification A-A-59544
NFPA70: National Electrical Code*

SURFACE PRINT

Sample: TYPE SE CABLE STYLE U TYPE THHN OR THWN CDRS 2 CDRS?
6 AWG 1 CDR 8 AWG 600V E11098-A (UL)

©2010, Cerro Wire LLC
All Rights Reserved



MADE IN THE USA

cerrowire®

Electrical Distribution Division: 800.523.3869 | FAX 877.877.9563
Consumer Markets Division: 866.572.3776 | FAX 812.793.2626
www.cerrowire.com

A Marmon Wire & Cable/
Berkshire Hathaway Company

Copper SEU

Type SE, Style U
Service Entrance

PRODUCT CODE NUMBER	2 CONDUCTORS		BARE NEUTRAL		APPROX. O.D. STRANDS	ALLOWABLE AMPACITIES*				APPROX. NET WT. LBS./M FT.	UPC CODE
	AWG SIZE	NO. OF STRANDS	AWG SIZE	NO. OF STRANDS		60°C **	75°C ***	90°C ****	DWELLING *****		
130-3200G	8-8	7	8	7	400 x 710	40	50	55	-	241	048243269303
130-3200J	8-8	7	8	7	400 x 710	40	50	55	-	241	048243269327
130-3200M											048243269334
130-3400F	6-6	7	8	7	400 x 770	55	65	75	-	313	048243269358
130-3400J	6-6	7	8	7	400 x 770	55	65	75	-	313	048243269372
130-3600E	6-6	7	6	7	400 x 790	55	65	75	-	348	048243269402
130-3600J	6-6	7	6	7	400 x 790	55	65	75	-	348	048243269426
130-3800E	4-4	7	6	7	470 x 950	70	85	95	100	486	048243269457
130-3800J	4-4	7	6	7	470 x 950	70	85	95	100	486	048243269471
130-4000E	4-4	7	4	7	470 x 1030	70	85	95	100	533	048243269501
130-4000J	4-4	7	4	7	470 x 1030	70	85	95	100	533	048243269525
130-4200J	3-3	7	5	7	500 x 1040	85	100	110	110	588	048243269570
130-4400J	3-3	7	3	7	500 x 1050	85	100	110	110	647	048243269624
130-4600J	2-2	7	4	7	565 x 1100	95	115	130	125	721	048243269679
130-4800J	2-2	7	2	7	565 x 1200	95	115	130	125	802	048243269723

* Per Table 310-16 NEC[®]

** For termination to equipment for circuits rated 100 amperes or less or marked for 14 AWG through 1 AWG conductors.

*** For termination to equipment for circuits rated over 100 amperes or marked for conductors larger than 1 AWG.

**** Dry locations.

***** For dwelling units, conductors shall be permitted at listed ampacities for 120/240 volt, 3-wire, single-phase service conductors that supply the total load. Per Table 310-15 (B)(6) NEC[®].

PACKAGE CODE	E	F	G	J
AWG SIZE	150' COIL	200' COIL	250' COIL	500' REEL
8-8-8 STRANDED			X	X
6-6-8 STRANDED		X		X
6-6-6 STRANDED	X			X
4-4-6 STRANDED	X			X
4-4-4 STRANDED	X			X
3-3-5 STRANDED				X
3-3-3 STRANDED				X
2-2-4 STRANDED				X
2-2-2 STRANDED				X
2/0-2/0-2/0 STRANDED				X