


Submersible Pump Cable

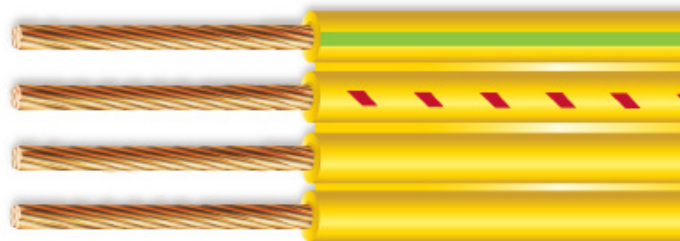

Flat
PVC Insulation

-25°C to 75°C

600 Volts

APPLICATIONS

For use within a well casing to supply current to a submersible pump. For use where the cable is not subject to repetitive handling required by frequent pump-unit service. Maximum conductor operating temperature: 75°C at voltages not exceeding 600 volts. Minimum operating temperature is -25°C.

CONDUCTORS

7-Wire Stranded: soft, uncoated copper per ASTM-B8

ASSEMBLY

- All conductors, including the ground wire, are laid flat and parallel and are covered with a yellow PVC insulation rated 75°C (Type THW). This PVC compound forms an interconnecting web between the conductors.
- One conductor is marked with the sample surface print shown below plus sequential footage markings in black.
- One conductor is printed with red hash marks.
- The grounding conductor is marked with a continuous green stripe and "FOR GROUNDING ONLY."
- On three-conductor cables with ground, the fourth conductor is unmarked.

INDUSTRY STANDARDS

UL 83
ASTM-B3
ASTM-B8
NFPA70: National Electrical Code®

SURFACE PRINT

Sample: 12 AWG (UL) THW SUBMERSIBLE PUMP CABLE 600 VOLTS 900 FT

©2010, Cerro Wire LLC
All Rights Reserved



MADE IN THE USA

cerro
Electrical®

866.572.3776 | FAX 812.793.2626
www.cerroretail.com

Marmon Retail Home
Improvement Products, Inc.

Submersible Pump Cable

Flat

PVC Insulation

| PRODUCT CODE NUMBER | AWG SIZE | NUMBER OF CONDUCTORS | CONDUCTOR STANDING | INSULATION THICKNESS MILS. | APPROX. SHIPPING WEIGHT LBS./M FT. | APPROX. DIMENSIONS MILS. | UPC CODE |
|---------------------|----------|----------------------|--------------------|----------------------------|------------------------------------|--------------------------|--------------|
| 141-2602J | 12 | 2 W/GRD | 7 x .0242 | 45 | 116 | 182 x 558 | 048243476824 |
| 141-2602K | 12 | 2 W/GRD | 7 x .0242 | 45 | 116 | 182 x 558 | 048243476848 |
| 141-2603J | 12 | 3 W/GRD | 7 x .0305 | 45 | 160 | 182 x 746 | 048243476862 |
| 141-2603K | 12 | 3 W/GRD | 7 x .0305 | 45 | 160 | 182 x 746 | 048243476886 |
| 141-2803J | 10 | 3 W/GRD | 7 x .0385 | 45 | 225 | 205 x 770 | 048243476947 |

| PACKAGE CODE | J | K |
|------------------|--------------------|-------------|
| AWG SIZE | 500' SPOOL OR REEL | 1,000' REEL |
| 12 STRD. 2 W/GRD | X | X |
| 12 STRD. 3 W/GRD | X | X |
| 10 STRD. 3 W/GRD | X | |