


Triplex Service Drop

Aluminum

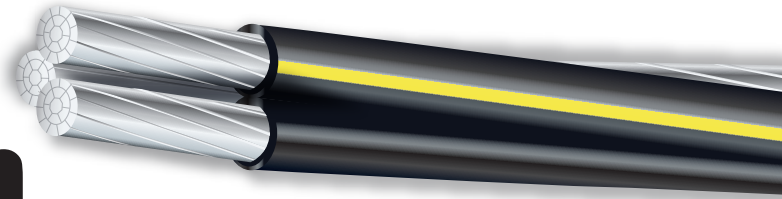

**ASTM-B231 Stranded
1350 Aluminum
Conductor**

**PE or XLP Insulated
Conductors**

ANSI/ICEA S-76-474

**600 Volts
(Phase to Phase)**

APPLICATIONS

May be used for service drop (pole-to-service entrance). May be used as secondary cable (pole-to-pole).

CONDUCTORS

Compressed stranded 1350 H-19 (hard-drawn) aluminum per ASTM B230 and B231

INSULATION

Black, low-density, polyethylene or cross-linked polyethylene (ANSI/ICEA S-76-474)

NEUTRAL

ACSR (Aluminum Conductor Steel Reinforced) ASTM-B232

ASSEMBLY

Two insulated conductors twisted around the bare neutral conductor

INDUSTRY STANDARDS

ASTM-B231 Stranded 1350 Aluminum Conductor
ASTM B-232 Aluminum Conductor Steel Reinforced
ANSI/ICEA S-76-474

SURFACE PRINT

Sample: XLPE YEAR/DATE/TIME or PE YEAR/DATE/TIME

©2010, Cerro Wire LLC
All Rights Reserved



LISTED



MADE IN THE USA

cerro
Electrical®

866.572.3776 | FAX 812.793.2626
www.cerroretail.com

Marmon Retail Home
Improvement Products, Inc.

Triplex Service Drop

Aluminum

PRODUCT NUMBER	PHASE CONDUCTOR			BARE NEUTRAL MESSENGER*			APPROX. NET WT. LBS/M. FT.	ALLOW AMPS.**	UPC CODE
	SIZE	STRANDING AWG	INSUL. MILS.	SIZE THICK MILS	STRANDING AWG	RATED STRENGTH LBS.			
TRIPLEX OVERHEAD SERVICE DROP CABLE									
542-4800J	2-2-2	7	45	2	6/1	2,850	266	150	662927588872

* ACSR Neutral Messenger

** 40°C ambient, 90°C conductor temperature, sun and wind. See Table 10 of the Aluminum Association "Ampacities for Aluminum and ACSR Overhead Electrical Conductors" for additional cases.

PACKAGE CODE	J
AWG SIZE	500' REEL
2-2-2	X

cerro
Electrical®

866.572.3776 | FAX 812.793.2626
www.cerroretail.com