

Security Cable

Shielded Security and Audio Cable

300V

-10°C to 75°C Insulation

Description:

May be used as security system cable, or for audio and intercom system applications not to exceed 300 volts when installed as specified by the National Electrical Code® (NEC) and other applicable standards.

Security cable is flame retardant and shielded to reduce signal interference.

Materials:


Two flexible, stranded-copper conductors cabled together and shielded with an overall aluminum/polyester shield and a stranded tinned copper drain wire. Conductors are insulated with PVC and encased in a PVC jacket. Rip cord provided for easier jacket stripping.

Standards:

UL 1424: E116676
Listed Type CL3R/FPLR
NEC Article 725 and 760 (National Electrical Code®)
UL 1666 Riser Flame Test
CA State Fire Marshal Approved

Surface Print:

Sample: E-116676 18 AWG CL3R/
FPLR (UL) – ROHS 000016438 FT

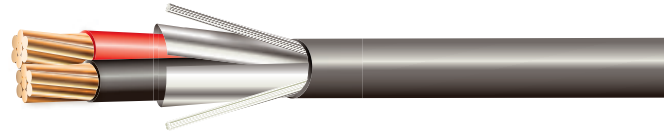

| Conductors | Conductor Size (AWG) | Stranding | Approx. Overall Dimensions (in) | Net Weight Lbs / MFt |
|------------|----------------------|-----------|---------------------------------|----------------------|
| 2 | 22 | 7 | 0.124 | 9.2 |
| 4 | 22 | 7 | 0.141 | 14.7 |
| 2 | 18 | 7 | 0.163 | 17 |
| 4 | 18 | 7 | 0.190 | 29.4 |

Data are approximate and subject to normal manufacturing tolerances.
It is the sole responsibility of the end user to determine suitability of this product for its intended use and application.

Jacket color:

● Grey

Features:

 RoHS compliant

