


The Cerrowire Innovation Lineup



**Cerrowire
innovations
save you time
and money.**

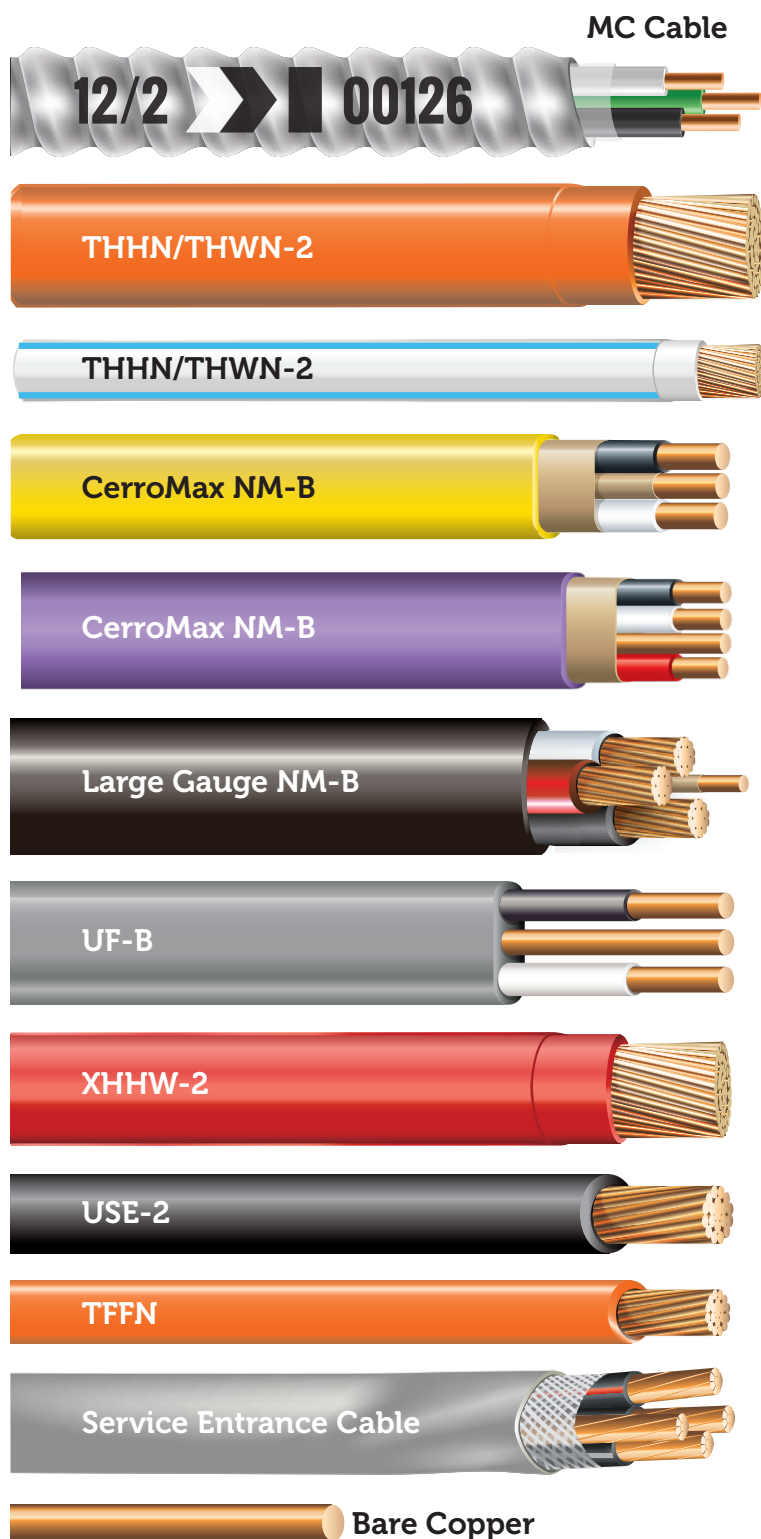

SLiPWire®
technology

SLiPWire® self-lubricating polymer jacket makes our 8 AWG – 1000 kcmil THHN and all CerroMax NM-B pull faster and smoother.

TRUE Sequential
Footage™

True Sequential Footage™ is printed right on the wire on 1 AWG and larger master reels. You'll always know what you've used and how much is left.

MaxPrint®

MaxPrint® clearly identifies the Cerrowire wire size with large print.



Scan to learn more
about Cerrowire product line

cerrowire®



PUT OUR LINEUP TO WORK

To find your local rep, scan the QR code or visit [Cerrowire.com/myrep](https://cerrowire.com/myrep)



AWG Wire	Ampacity		
	60° C (140° F)	75° C (167° F)	90° C (194° F)
	NM-B UF-B	SER SEU THWN	THHN THWN-2 XHHW-2 USE-2
14	15	20	25
12	20	25	30
10	30	35	40
8	40	50	55
6	55	65	75
4	70	85	95
3	85	100	115
2	95	115	130
1	--	130	145
1/0	--	150	170
2/0	--	175	195
3/0	--	200	225
4/0	--	230	260
250	--	255	290
300	--	285	320
350	--	310	350
500	--	380	430
600	--	420	475
750	--	475	535
1000	--	545	615



Cerrowire has five manufacturing plants across the USA.




FAST SHIPPING

Direct from our plants or from one of our three distribution centers.



Data are approximate and subject to normal manufacturing tolerances.
It is the sole responsibility of the end user to determine suitability of this product for its intended use and application.



Scan to learn more about Cerrowire product line

cerrowire®