
## Our Best Lineup of the Century



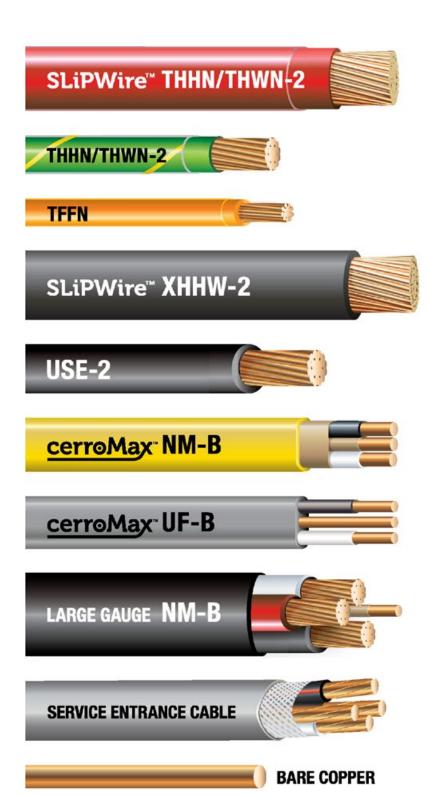

Cerrowire celebrates over **100 years** of **Made in the USA** copper wire with innovations that save you time and money.

# **SLiPWire** technology

SLiPWire® self-lubricating polymer jacket makes our 8 AWG – 1000 kcmil THHN and all CerroMax NM-B pull faster and smoother. In addition, our Co-Extrusion delivers a stronger bond between the insulation and the outer jacket.

### IKUE Sequential Footage™

True Sequential Footage™ is printed right on the wire on 1 AWG and larger master reels. You'll always know what you've used and how much is left.

#### **MaxPrint®**

MaxPrint® clearly identifies the Cerrowire wire size with large print.





	Ampacity		
	60° C (140° F)	75° C (167° F)	90° C (194° F)
AWG Wire	NM-B UF-B	SER SEU THWN	THHN THWN-2 XHHW-2 USE-2
14	15	20	25
12	20	25	30
10	30	35	40
8	40	50	55
6	55	65	75
4	70	85	95
3	85	100	115
2	95	115	130
1		130	145
1/0		150	170
2/0		175	195
3/0		200	225
4/0		230	260
250		255	290
300		285	320
350		310	350
500		380	430
600		420	475
750		475	535
1000		545	615



Cerrowire has four manufacturing plants across the USA.



#### **FAST SHIPPING**

Direct from our plants or from one of our four distribution centers



Data are approximate and subject to normal manufacturing tolerances. It is the sole responsibility of the end user to determine suitability of this product for its intended use and application.

